



La Tecnología  
solo es  
Inteligente  
cuando es Solar



[www.solartdi.com](http://www.solartdi.com)

Polígono Industrial Romica. Avda. A. Parcela 8/ 3. 02008 Albacete. ESPAÑA



# BOLARDO DE ILUMINACIÓN SOLAR



BI-FUNCIONAL; LUZ DE PRESENCIA E ILUMINACIÓN  
 CONMUTABLE POR DETECCIÓN DE SONIDO.  
 GRAN RESISTENCIA, ALEACIÓN DE ALUMINIO




SGLTDI-06

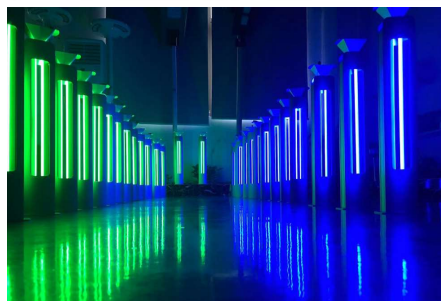

## ESPECIFICACIONES

Model	SGLTDI-06
LED	3W+1W ( White + Green or White + Blue )
Battery type	Rechargeable Li-ion battery
Solar panel	3W
CCT	White 6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	If no voice detected , will be always with landscape lighting , once voice detected will be with white light and keep for 30s until no noise (>60db)
Material	Aluminum alloy case +ABS +PC
Size	Dia180* H650mm ( Other Height can be customized )
Working Temperature	-25°C to 65°C IP65
Installation	60cm
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

# BOLARDO CON PANEL SOLAR DE DOBLE CARA PARA CARGA MÁS EFICIENTE



## DISEÑO MODERNO CON DOBLE CRISTAL REFLECTOR

ESTRUCTURA ROBUSTA DE ALEACIÓN DE ALUMINIO.  
PANEL SOLAR DE DOBLE CARA PARA CARGA RÁPIDA.




**SGLTDI-08**



### ESPECIFICACIONES


Model	SGLTDI-08
LED	500lumens
Battery type	Rechargeable Li-ion battery
Solar panel	6W Double sided glass solar panel
CCT	White 6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Steady light at night
Material	Aluminum alloy case +ABS +PC
Size	200*100*610mm ( Other Height can be customized )
Working Temperature	-25°C to 65°C IP65
Installation	60cm
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

# BOLARDO DE DISEÑO CON LUZ INDIRECTA



## DISEÑO MODERNO DE ESTRUCTURA ANGULAR

ALEACIÓN DE ALUMINIO DE GRAN RESISTENCIA A LA INTEMPERIE Y FOCO INVISIBLE.

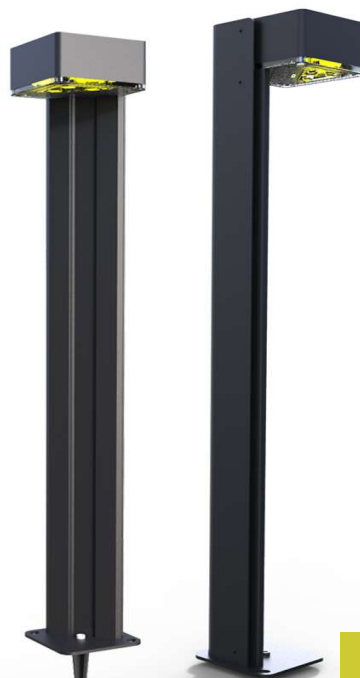


**SGLTDI-09**



### ESPECIFICACIONES


Model	SGLTDI-09
LED	480lumens
Battery type	Rechargeable Li-ion battery
Solar panel	1.2W solar panel
CCT	White 6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Steady light at night
Material	Aluminum alloy case +ABS +PC
Size	L92*W92*H528mm ( Other Height can be customized )
Working Temperature	-25°C to 65°C IP65
Installation	52.8cm
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

# CUMBRERA DE LUZ DE LED SOLAR. REMATE DE COLUMNA PARA DECORACIÓN



## LUZ DE CORTESÍA Y DECORACIÓN

Construido en Policarbonato de gran resistencia  
Con doble iluminación de presencia e indirecta

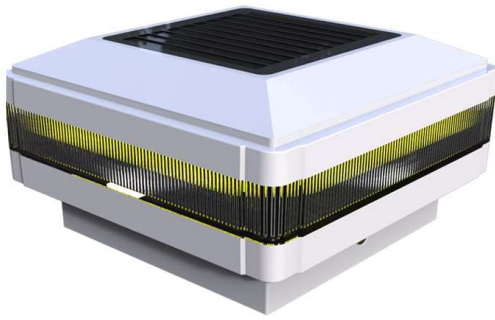

SGLTDI-03




## ESPECIFICACIONES

Model	SGLTDI-03
LED	500lumens
Battery type	Rechargeable Li-ion battery
Solar panel	1.2W solar panel
CCT	White 6000-6500K Warm white 3000-3500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Steady light at night
Material	ABS +PC
Size	L132*W132*H72mm
Working Temperature	-25°C to 65°C IP65
Installation Post size	All different size post cap can be suitable
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

# FAROLA SOLAR PARA ILUMINACIÓN DE RESIDENCIAS PARA MÁSTIL Y PARED

## CON SENSOR DE DETECCIÓN DE MOVIMIENTO

CON LEDS DE ALTA EFICIENCIA Y AUTONOMÍA



**SGLTDI-05**


**SGLTDI-05 Pro**



### ESPECIFICACIONES

Model	SGLTDI-05 SGLTDI-05 Pro
LED	2000lumens 4000lumens
Battery type	Rechargeable Li-ion battery
Solar panel	14W (28w) High efficiency solar panel
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	PIR motion sensor working
Material	Aluminum Alloy case +PC lens
Size	350*200*40mm 700*200*40mm
Working Temperature	-25°C to 65°C IP65
Installation height	3-4M, wall mounted or pole mounted
Application	Street, courtyard, garden, park, roadway, public square, campus, remote area, hacienda, pasture, mongolia yurt, parking lot, tennis court.

# MESA DE TERRAZA SOLAR MULTIMEDIA Y PARA CARGA DE DISPOSITIVOS




CON ALTAVOCES Bluetooth

FABRICADA EN ALUMINIO Y CRISTAL DE ALTA RESISTENCIA  
FUNCIÓN DE CARGA POR INDUCCIÓN (SIN CABLE)



SSYL01TDI-D

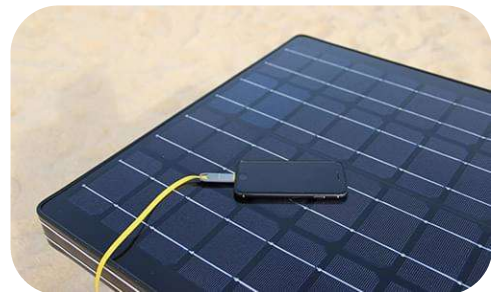

## ESPECIFICACIONES

Model	SSYTDI-DL01
LED	N/A
Battery type	Rechargeable Li-ion battery
Solar panel	40W mono crystalsilicon solar panel
Solar charging time	6-8hrs by bright sunlight
Material	Aluminum alloy case
Size	L600*W600*H680MM ( Other Height can be customized )
Working Temperature	-25°C to 65°C IP54
Bluetooth speaker	5W
Applications	Family terraces, hotels, villas, gardens, leisure places, patio ,Motorhome, self-driving travel

# INTEGRATED SOLAR BILLBOARD LIGHT

PORTABLE DESIGN  
ENVIRONMENTAL-FRIENDLY DESIGN



SSLTDI-04A



SSLTDI-04B



SSLTDI-04C



*\*Remote control function can be customized\**



## Specification


Model	SSLTDI-04A	SSLTDI-04B	SSLTDI-04C
LED	500LM	1000LM	2000LM
Battery Type	Rechargeable Li-ion Battery		
Solar Panel	4.5W 19.4% efficiency	9W 19.4% efficiency	18W 19.4% efficiency
Charging methods	Solar power/ DC (Optional)		
Charging Time	7-8hrs		
Lighting Time	2-3 days once full charged		
Lighting Mode	Full light for 5hrs + Dim		
IP level	IP65		
Material	Aluminum Alloy+ABS		
Size	300*67*115 MM	600*67*115MM	1200*67*115MM
Application	Garden, yard, aisle, porch, patio, or driveway etc.		




# ILUMINADOR SOLAR ILUMINACIÓN DE PLACAS Y CARTELES INDICADORES

## SENSOR DE DETECCIÓN DE MOVIMIENTO

ALEACIÓN DE ALUMINIO Y LEDs DE ALTA EFICIENCIA




SWLTDI-12



### ESPECIFICACIONES

Model	SWLTDI-12
LED	1000lumens
Battery type	Rechargeable Li-ion battery
Solar panel	4W High efficiency solar panel
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Microwave sensor working (PIR Working options )
Material	Aluminum Alloy case +PC lens
Size	300*117*56MM
Working Temperature	-25°C to 65°C IP65
Installation height	2.5-3M , wall mounted or pole mounted
Application	Wall , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , door plate .


# FOCO DE LUZ SOLAR CON DETECCIÓN DE PRESENCIA Y CÁMARA WIFI




CON App PARA VISUALIZACIÓN y recepción de alarmas por detección de movimiento



Tres diferentes modos de iluminación seleccionables manualmente

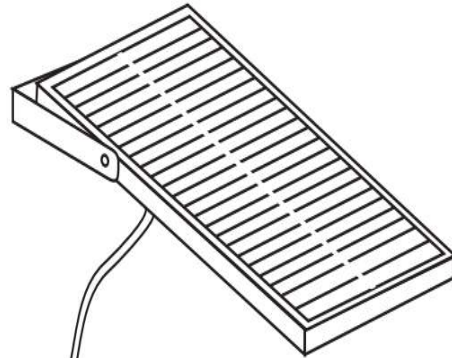


SFLTDI-SHE10



## ESPECIFICACIONES

Model	SFLTDI-SHE10
LED	20W
Battery type	Rechargeable Li-ion battery
Solar panel	20W High efficiency solar panel
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Three lighting mode by manual switch
Material	Aluminum Alloy case +PC lens
Size	350*200*40mm
Working Temperature	-25°C to 65°C IP65
Installation height	3-4M , wall mounted
Application	Garage , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

# FOCO SOLAR PARA ENTRADAS: GARAGE, ALMACEN ...etc.




CON DETECTOR DE MOVIMIENTO

TRES DIFERENTES ÁNGULOS DE ILUMINACIÓN SELECCIONABLES.



**SFLTDI-10**

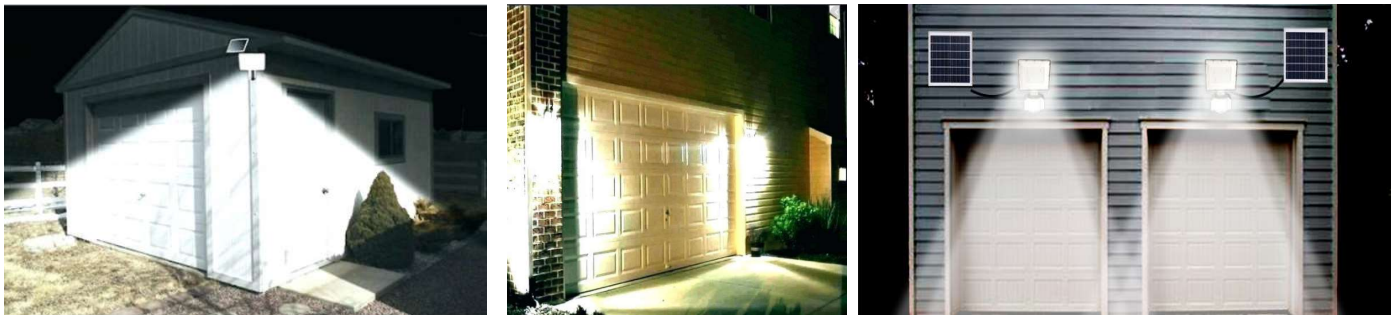

## ESPECIFICACIONES

Model	SFLTDI-10
LED	80PCS 1000lumens
Battery type	Rechargeable Li-ion battery
Solar panel	5W High efficiency solar panel
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Three lighting mode by manual switch
Material	UV Procted PC +ABS
Size	163*232*92mm
Working Temperature	-25°C to 65°C IP65
Installation height	2-3M , wall mounted
Application	Garage , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

# NEW ITEMS


## SOLAR STEP LED LIGHT



SWLTDI-03



SWLTDI-03C

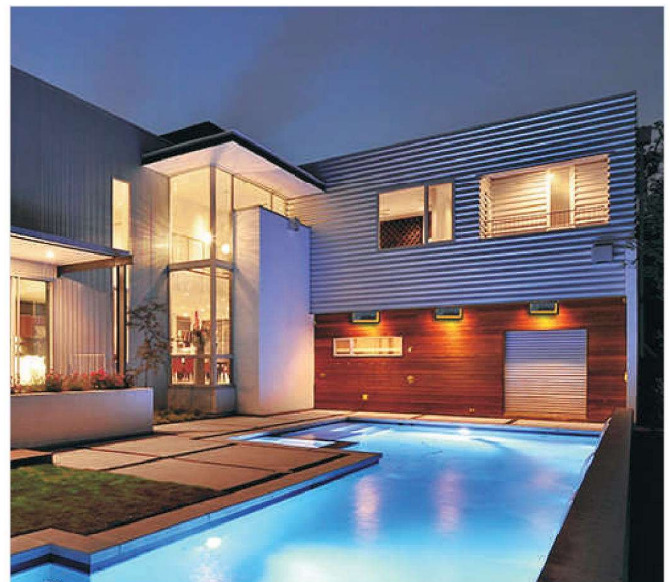

### Specification

Model	SWLTDI-03	SWLTDI-03C
LED	50-60lumens (White LED)	50-60lumens (White LED + Color Leds)
Battery Type	Rechargeable Li-ion Battery	
Solar Panel	1.8W 17% efficiency	
Solar Charging Time	6-8 hours by bright sunshine	
Lighting Time	3-5days	
Lighting Mode	Light sensor	Light sensor+Sound sensor
IP level	55	
Material	Aluminum Alloy+PC	
Size	248*104MM	
Work Temperature	-25°C to 65°C	
Application	Villa step/fence/garden wall/courtyard wall/park wall/villa balcony	

# SOLAR TRAFFIC SIGNAL FLASHING LIGHT

PORTABLE DESIGN  
ENVIRONMENTAL-FRIENDLY DESIGN



ESTLTDI-02



ESTLTDI-03-A



ESTLTDI-03-B



## Specification

Model	ESTLTDI-02	ESTLTDI-03-A	ESTLTDI-03-B
LED	96PCS	One Unit for 20PCS	One Unit for 20PCS
Battery Type	Lead acid battery		
Solar Panel	18W 17% efficiency		
Solar Charging Time	6-8 hours by bright sunshine		
Lighting Time	> 72hrs , continous discharging time :200H		
IP level	65		
Material	Aluminum Alloy+PC		
Size	350*350*150MM	260*170*250MM	260*170*250MM
Visible distance	> 1000M (Night)		
Work Temperature	-25°C to 65°C		
Application	Used for cross road , high way , turning road , school , parking area , foggy area etc		

# PORTABLE SOLAR ROAD STUD



PORTABLE DESIGN  
ENVIRONMENTAL-FRIENDLY DESIGN



ESTLTDI-04-A




ESTLTDI-04-B




## Specification

Model	ESTLTDI-04-A	ESTLTDI-04-B
Name	Solar Road Stud	Solar Road Stud-Hippocrepiform
LED	6PCS (Color: Red, Green, Blue, Yellow, White)	
LED Wave Length	620-650NM	
Lighting Time	7-10days after fully charged	
Lighting Mode	Flashing (120 Times/min)	Constant lighting
Visible distance	>500M (Night)	
Battery	1.2V 800mAh NI-MH	
IP level	68	
Material	Aluminum Alloy+PC	
Size	106*95*22MM	
Warranty	1 year	

# SISTEMAS DE ALIMENTACIÓN SOLAR DE GRAN CAPACIDAD



FUENTE DE ALIMENTACIÓN SOLAR PARA CCTV, ALUMBRADO, TELECOMUNICACIONES...ETC

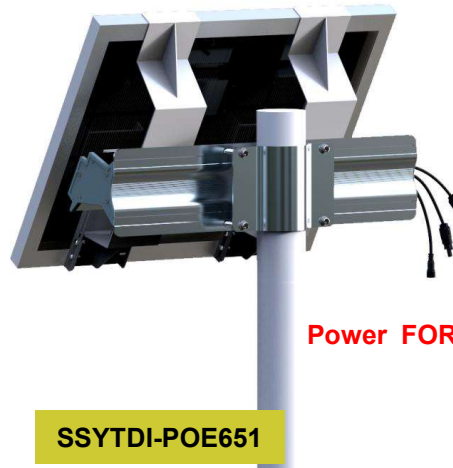

Power FOR



Small Warehouse



Gas Station



Fishing Boat



Base Station

## ESPECIFICACIONES

Model	ESSTDI-POE325		ESSTDI-POE651	
Battery type	Rechargeable Li-ion battery			
Solar panel	60W High efficiency solar panel (OEM)		100W High efficiency solar panel (OEM)	
Output	12V 2A or 48V 0.5A (OEM)			
Solar charging time	6-8hrs by bright sunlight			
Power Supply	Any low Voltage electrici devices . (CCTV Camera , led lighting , wifi router ,fans, ect .			
Material	Aluminum Alloy case			
Size	445*160*150MM	710*535*25MM	600*160*150MM	870*670*35MM
Working Temperature	-25°C to 65°C IP65			
Installation height	Wall mounted or pole mounted			
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .			
OEM ODM Service	Customized as requested .			