



BOLARDO DE ILUMINACIÓN SOLAR



BI-FUNCIONAL; LUZ DE PRESENCIA E ILUMINACIÓN
 CONMUTABLE POR DETECCIÓN DE SONIDO.
 GRAN RESISTENCIA, ALEACIÓN DE ALUMINIO



SGLTDI-06

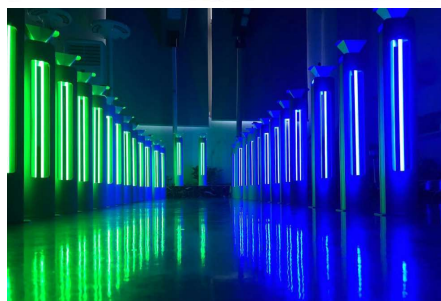

ESPECIFICACIONES

Model	SGLTDI-06
LED	3W+1W (White + Green or White + Blue)
Battery type	Rechargeable Li-ion battery
Solar panel	3W
CCT	White 6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	If no voice detected , will be always with landscape lighting , once voice detected will be with white light and keep for 30s until no noise (>60db)
Material	Aluminum alloy case +ABS +PC
Size	Dia180* H650mm (Other Height can be customized)
Working Temperature	-25°C to 65°C IP65
Installation	60cm
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

BOLARDO CON PANEL SOLAR DE DOBLE CARA PARA CARGA MÁS EFICIENTE



DISEÑO MODERNO CON DOBLE CRISTAL REFLECTOR

ESTRUCTURA ROBUSTA DE ALEACIÓN DE ALUMINIO.
PANEL SOLAR DE DOBLE CARA PARA CARGA RÁPIDA.



SGLTDI-08



ESPECIFICACIONES

Model	SGLTDI-08
LED	500lumens
Battery type	Rechargeable Li-ion battery
Solar panel	6W Double sided glass solar panel
CCT	White 6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Steady light at night
Material	Aluminum alloy case +ABS +PC
Size	200*100*610mm (Other Height can be customized)
Working Temperature	-25°C to 65°C IP65
Installation	60cm
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

BOLARDO DE DISEÑO CON LUZ INDIRECTA



DISEÑO MODERNO DE ESTRUCTURA ANGULAR

ALEACIÓN DE ALUMINIO DE GRAN RESISTENCIA A LA INTEMPERIE Y FOCO INVISIBLE.




SGLTDI-09



ESPECIFICACIONES


Model	SGLTDI-09
LED	480lumens
Battery type	Rechargeable Li-ion battery
Solar panel	1.2W solar panel
CCT	White 6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Steady light at night
Material	Aluminum alloy case +ABS +PC
Size	L92*W92*H528mm (Other Height can be customized)
Working Temperature	-25°C to 65°C IP65
Installation	52.8cm
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

CUMBRERA DE LUZ DE LED SOLAR. REMATE DE COLUMNA PARA DECORACIÓN




LUZ DE CORTESÍA Y DECORACIÓN

Construido en Policarbonato de gran resistencia
Con doble iluminación de presencia e indirecta

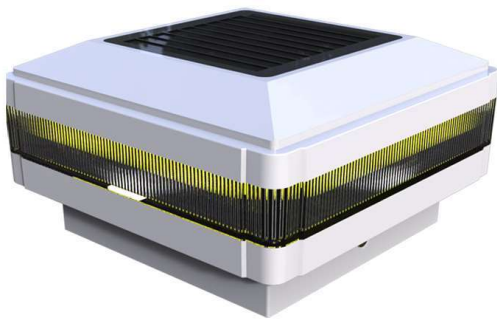

SGLTDI-03

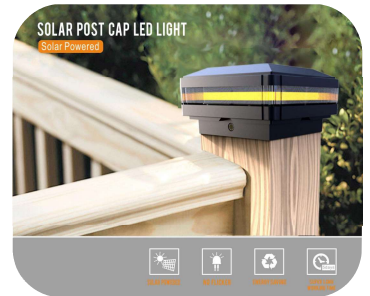

ESPECIFICACIONES

Model	SGLTDI-03
LED	500lumens
Battery type	Rechargeable Li-ion battery
Solar panel	1.2W solar panel
CCT	White 6000-6500K Warm white 3000-3500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Steady light at night
Material	ABS +PC
Size	L132*W132*H72mm
Working Temperature	-25°C to 65°C IP65
Installation Post size	All different size post cap can be suitable
Application	Street , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

FAROLA SOLAR PARA ILUMINACIÓN DE RESIDENCIAS PARA MÁSTIL Y PARED


CON SENSOR DE DETECCIÓN DE MOVIMIENTO

CON LEDS DE ALTA EFICIENCIA Y AUTONOMÍA



SGLTDI-05

SGLTDI-05 Pro



ESPECIFICACIONES

Model	SGLTDI-05 SGLTDI-05 Pro
LED	2000lumens 4000lumens
Battery type	Rechargeable Li-ion battery
Solar panel	14W (28w) High efficiency solar panel
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	PIR motion sensor working
Material	Aluminum Alloy case +PC lens
Size	350*200*40mm 700*200*40mm
Working Temperature	-25°C to 65°C IP65
Installation height	3-4M, wall mounted or pole mounted
Application	Street, courtyard, garden, park, roadway, public square, campus, remote area, hacienda, pasture, mongolia yurt, parking lot, tennis court.

FOCO DE LUZ SOLAR CON DETECCIÓN DE PRESENCIA Y CÁMARA WIFI





CON App PARA VISUALIZACIÓN y recepción de alarmas por detección de movimiento



Tres diferentes modos de iluminación seleccionables manualmente




SFLTDI-SHE10



ESPECIFICACIONES

Model	SFLTDI-SHE10
LED	20W
Battery type	Rechargeable Li-ion battery
Solar panel	20W High efficiency solar panel
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Three lighting mode by manual switch
Material	Aluminum Alloy case +PC lens
Size	350*200*40mm
Working Temperature	-25°C to 65°C IP65
Installation height	3-4M , wall mounted
Application	Garage , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .

FOCO SOLAR PARA ENTRADAS: GARAGE, ALMACEN ...etc.




CON DETECTOR DE MOVIMIENTO

TRES DIFERENTES ÁNGULOS DE ILUMINACIÓN SELECCIONABLES.



SFLTDI-10

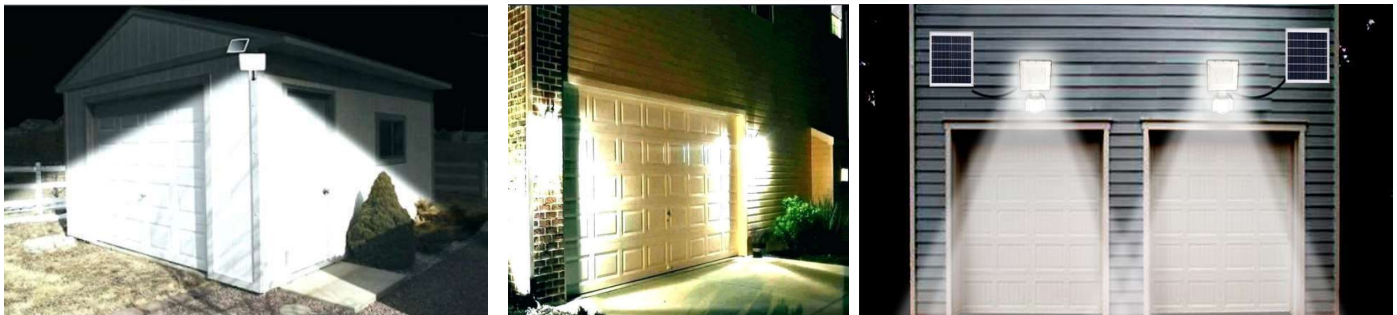

ESPECIFICACIONES

Model	SFLTDI-10
LED	80PCS 1000lumens
Battery type	Rechargeable Li-ion battery
Solar panel	5W High efficiency solar panel
CCT	6000-6500K (OEM Acceptable)
Solar charging time	6-8hrs by bright sunlight
Lighting Mode	Three lighting mode by manual switch
Material	UV Procted PC +ABS
Size	163*232*92mm
Working Temperature	-25°C to 65°C IP65
Installation height	2-3M , wall mounted
Application	Garage , courtyard , garden , park , roadway , public square , campus , remote area , hacienda , pasture , mongolia yurt, parking lot , tennis court .